



**AUSTRALIAN  
WEIGHING  
EQUIPMENT**  
*Way ahead in Weighing*

PRODUCT GUIDE

# GS2150 BATCH INDICATOR

---





## ■ FEATURES

- Batches Powders; Liquids; Semi Solids; Potatoes; Fruits - anything that can be fed into a container.
- Batched weights can be a few GRAMS in sub gram increments all the way to many TONS in kg increments.
- The Complete Low Cost Automated batching solution - all batching logic is "built in".
- Add Load Cells, one or two Push Buttons as INPUTS, a 5VDC~24VDC Power Supply to operate your relays and contactors controlled by the GS2150 OUTPUTS and you are ready to fill bags, bottles, boxes - anything - easily!
- Easy to use. Entering weight settings is straightforward using the GS2150's sensibly sized front panel layout with clearly labelled function and logical operating procedure.
- Short 180mm rear projection including connectors enables fitment in standard 210 depth enclosures.
- Very easy to setup and calibrate. Weight calibration takes very little time and few steps - for ZERO key CAL then ZERO; for WEIGHT CALIBRATION apply a known weight key CAL then SPAN, enter the weight and the rest is FULLY AUTOMATIC.
- FOUR Optically Isolated Outputs rated 5VDC to 45VDC 1A for control of FAST & SLOW Speed Material Feeders, ZERO BAND & BATCH COMPLETE Indication. Outputs can directly operate most solenoids without external relays.
- FOUR Optically Isolated Inputs from your Push Buttons/Switches or PLC rated 5VDC to 24VDC for START, STOP, KEYBOARD LOCK and TARE functions.
- Every internal setting, function and operation of every GS2150 is 100% TESTED including THERMAL STABILITY over 0oC to 40oC.

## ■ APPLICATIONS

- Filling Machines for Sachets, Small Bags and Containers.
- Filling Machines for Sacks and Boxes of Potatoes, Fruits and Vegetables.
- Filling Machines for 20kg BAGS of Cements and other Powders.
- Batching IN or Batching OUT applications from large HOPPERS or BINS.
- Accurate DOSING applications.
- Anything that requires VERY ACCURATE batched weights. The GS2150's up to 800 sample per second rate ASSURES HIGH ACCURACY.

The ONLY essential external controls needed to operate the GS2150 are TWO N/O Pushbuttons. A START and a STOP. A LOCK Input and a HOLD Input can be used if needed.

The GS2150 has FOUR Outputs. TWO drive the material FEEDERS - SLOW SPEED and HIGH SPEED. Often only ONE is used - SLOW SPEED. The other TWO outputs for ZERO BAND and BATCH COMPLETE are there if required.

The figure on the next page shows one example of the many types of batching cycle the GS2150 can be setup to perform. In this example, the GS2150 has been programmed to Batch material IN {into a bag from a bulk container} by NET weight and to automatically acquire tare {to cancel out the weight of the bag} when the Batch START input BUTTON is operated. The GS2150's Automatic In-Flight compensation adjustment is set ON with an adjustable settling time of 2 seconds. {It waits 2 seconds before changing the BATCH COMPLETE output}



## GS2150 Batch Indicator


The BATCH CYCLE commences with the BAG being placed on the SCALE and due to its weight, the GROSS weight is not ZERO.

The remote START input is pressed {closed}.

The GS2150 then automatically tares the BAG'S weight {the Gross weight} to obtain a NET weight of ZERO. After this, both MATERIAL FEEDER OUTPUTS and the BATCH COMPLETE OUTPUT are turned on.

Material is then fed at a rate controlled by both feeders. While the weigh hopper (or bag) is being filled, the GS2150 compares the actual weight with the target weight settings at a rate up to 800 times/second using the GS2150's linear predictive modelling.

When the "Final weight minus the Preliminary setting" is reached the HIGH SPEED FEEDER OUTPUT latches off. Feeding continues at the SLOW SPEED feeder rate until the "Final weight minus the In-Flight setting" is reached, when the SLOW SPEED FEEDER OUTPUT latches off. The GS2150's internal BATCH COUNTER is then incremented by one and the adjustable settling time interval of 2 seconds commences. After this time interval, the GS2150 makes any necessary AUTOMATIC IN-FLIGHT COMPENSATION ADJUSTMENTS and latches the BATCH COMPLETE OUTPUT off to signal the end of the batch. The hopper or bag can then be discharged and a new batch started using the ZERO BAND OUTPUT to detect the empty condition.

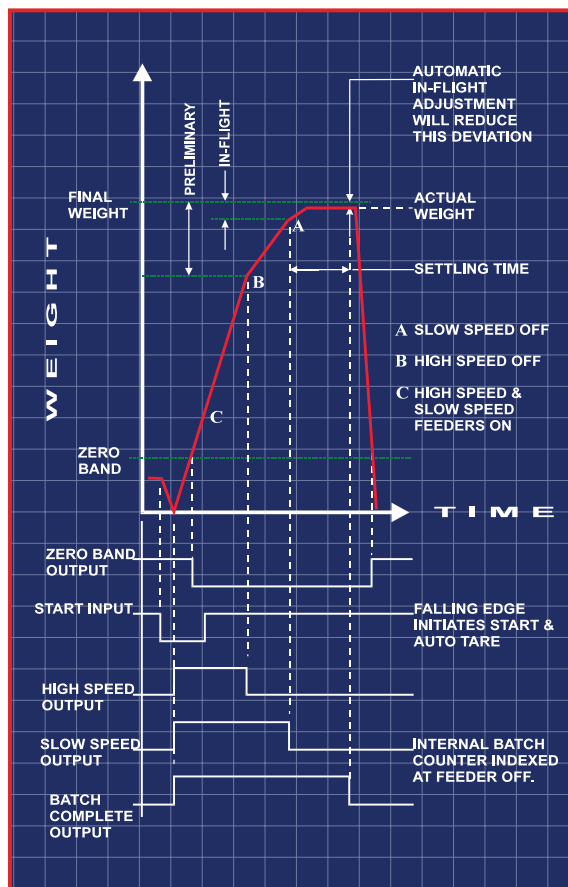

### ■ SPECIFICATIONS

**LOAD CELL INPUT.** -1mV to 30mV; to 10,000 divisions by 1V~75V/divisions. Displays -4% to +104% FS range. Excitation 10VDC 230mA Short Circuit Protected. True differential remote sensing using a separate pair of wires.

**ACCURACY & STABILITY.** Linearity <0.01%FS; Span Stability <30ppm/oC; Zero Stability <0.5mV/oC 30ppm/oC of dead load offset; Noise 1V p-p RTI maximum. Active 2Hz 2 Pole Low Pass Analog Filter plus Digital Filtering via selective A/D averaging.

**FRONT PANEL.** SIX digit 14mm 7 segment High Intensity red LED display to a maximum of 199990 plus SIX LED lamps. Positive action tactile feedback keyboard behind tough water resistant membrane.

**FOUR CONTROL OUTPUTS.** Fast and Slow Speed feeder control, Batch Complete and Zero band. Optically isolated open collector capable of sinking 1Amp 5VDC to 45V DC from a user's DC power supply.

**FOUR CONTROL INPUTS.** Tare, Keyboard Lock, Stop and Start. Optically isolated input with internal 2.2kOhm current limiting resistor. The user's 5VDC to 24VDC power supply is sunk through the user's controls.

**PHYSICAL/ENVIRONMENTAL.** All metal panel mounting enclosure including panel mounting slides. Front panel 198mm wide x 96mm high; Body 184mm wide x 90mm high x 150mm long. Panel mounting DIN standard cut out 186mm wide x 92mm high. Panel rear projection 170mm including connectors. Shipping weight 3kg. Environment -10C to +40C Operating; -15C to +70C Storage; to 95%RH non condensing. Normal power 240VAC 10% 49~62Hz 15VA. Rear Panel includes Power cable receptacle, Fuse & fuse holder, 9 pin D load cell connector and 10 pin removable screw terminal block for control Input/Output connections.

**OPTIONS:- BR1** Factory fitted battery backed memory to save batch counts, tare weight, adjusted In-Flight setting, "memorized" batched weight and zero tracked value on power failure. Not required to save all other settings;

**TOTALS/BR1** same as **BR1** BUT includes NINE digits of stored Material Usage and Batch Count.

**ORDERING GUIDE.** Order GS2150 Batch Controller. Specify mains voltage and, if required **Option BR1 or TOTALS/BR1**. All connectors and mounting hardware are supplied as standard.



■ **AWE - THE BEST IN THE BUSINESS**

AWE has built a reputation in providing world class products and services to customers from a wide range of industries for many unique applications. All the products come with AWE Quality Guarantee- giving you the assurance that they have been tested to meet or exceed the specifications and requirements of your application. At AWE, it's more than just delivering perfectly-designed equipment, it also requires a team of dedicated people who will back you up with great service and support. Any servicing, installation and technical support issues you encounter can be addressed either onsite or remotely by our engineers and tradesmen who carry qualifications as:

- Licensed Tradesmen
- Mechanical Engineers
- Electrical Engineers
- Structural Engineers
- Draftsmen
- Fitter & Turners
- Boilermakers
- Fully Qualified Scale Makers
- Electronic Technicians
- Instrument Fitters
- Electricians
- Service Technicians
- Project Managers
- Formworkers
- Concreters

Call AWE today.



If you have questions about


- **weighing equipment**
- **packaging equipment**
- **bulk materials handling**
- **componentry**

call the sales team at *AWE Group* to find the right solution for your individual needs.


■ **AWE PRODUCT RANGE**



Weighbridges



Load Cells



Scales



Crane Scales



Indicators



Packaging Equipment



Onboard Weighing



Batching Consoles



Test Weight



Maintenance



## ■ WHO IS “AUSTRALIAN WEIGHING EQUIPMENT GROUP”

Jeff & Trevor Baillie started Australian Weighing Equipment (or AWE) in 1981, focusing on weighing solutions based on engineering principles. For nearly 40 years AWE has built its reputation as a leading supplier of robust weighing, packaging & bulk handling equipment. Our innovative engineering and continuous product developments have led to designs that will stand up to the rigours and demands of your applications.

AWE has increased its investment in manufacturing facilities with a new 3,200sq/m factory in Sydney which has

- A CNC Machine Shop
- Heavy Metal Fabrication Shop
- Larger work areas for our team of qualified tradesman

Acquisitions of Bradwood Packaging and Dendy Packaging and Design Engineering has increased our packaging and engineering experience.

In 2008, AWE established a manufacturing facility in China - AWE Group Packaging and Bulk Materials Handling Equipment, a purpose-built 5,000sq/m factory in Suzhou China (70kms From Shanghai).

All of the products we offer are Australian designed and manufactured under our strict quality control system in our own factories both locally and internationally.

## ■ LOCATIONS OF AUSTRALIAN WEIGHING EQUIPMENT



Australian Weighing  
Equipment - Sydney Office

8 Heald Road  
Ingleburn NSW 2565



Australian Weighing  
Equipment - Melbourne Office

37 Barrie Road  
Tullamarine, VIC, 3043



Australian Weighing  
Equipment - Brisbane Office

7 Darnick Street  
Underwood, QLD1 4119

## ■ AUSTRALIAN WEIGHING EQUIPMENT ON SOCIAL MEDIA



@AustralianWeighingEquipment



@australianweighingequipment



/company/awegrouppaustralia



www.youtube.com/AustWeighing



www.awe.com.au

Dealer's Information:

SCAN HERE



www.awe.com.au

Brochure: 150920  
Version: 140820